

# SERVICE BULLETIN



Service Bulletin No.: DAC1-92-02, Rev. 0

Date Issued: 28 February 2007

Title: Certification, United Kingdom Import Requirements

Page: 1 of 2

1. **ATA Code:** Not Applicable
2. **Effectivity:** DA20-C1 s/n C0001 and subsequent, for operation under UK registry.
3. **General:** This bulletin describes modifications required for aircraft operation under United Kingdom registry.
4. **Compliance:** Prior to the issue of a UK Certificate of Airworthiness.
5. **Approval:** Data referenced or contained in this service bulletin is CAA (UK) approved.
6. **Labour:** N/A

7. Material	Part	Description	Qty.
	22-3910-04-09	Label, VLA Limits (Spinning Prohibited)	1
	CAA Supplement 1, Issue 1	CAA-approved Flight Manual Supplement	1
	Change Sheet No 1, Issue 1	CAA-approved AFM change sheet	1

The items listed above are available from Diamond Aircraft.

8. **Special Tools:** None
9. **References:** Aircraft Flight Manual Doc. DA202-C1 (AFM)  
Aircraft Maintenance Manual Doc. DA201-C1 (AMM)

## 10. Accomplishment Instructions:

- 10.1 **Label** - Insure the VLA label (spinning prohibited) is correctly installed, as per the flight manual, document DA202-C1.

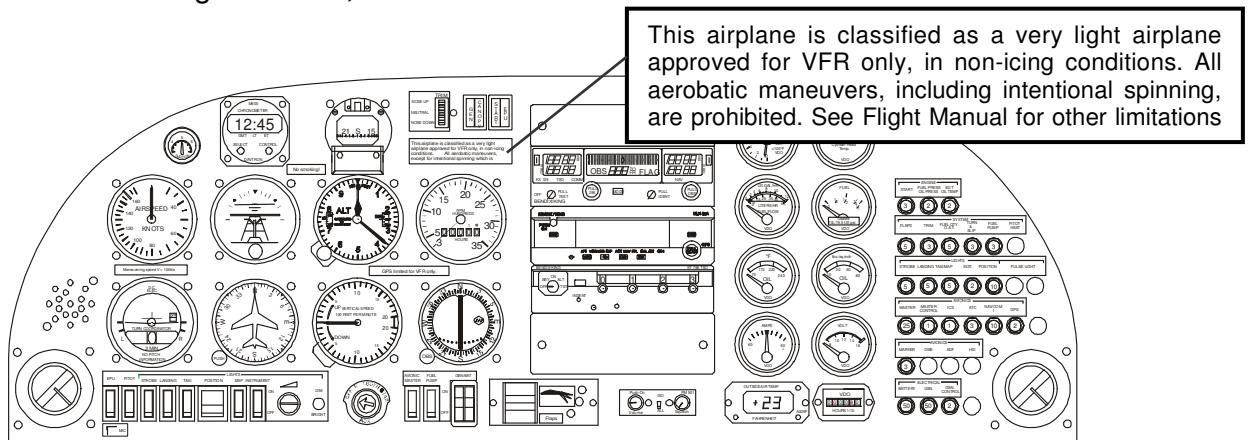


Figure 1 – VLA Label placement on the instrument panel

# SERVICE BULLETIN



**Service Bulletin No.:** DAC1-92-02, Rev. 0

**Date Issued:** 28 February 2007

**Title:** Certification, United Kingdom Import Requirements

**Page:** 2 of 2

- 
- 10.2 **AFM** - Insert CAA Supplement 1, Issue 1 at the back of the Aircraft Flight Manual.
  - 10.3 **AFM** - Insert Change Sheet No 1, Issue 1 opposite page 2-7, 2-9 and 3-2 of the Aircraft Flight Manual
  - 10.4 **AFM** - Remove Supplement 4 from Aircraft Flight Manual.
  - 10.5 **W&B** - Ensure that the Aircraft Specific Weighing Report from Chapter 6 of the Aircraft Flight Manual (1653 lb / 750 kg maximum weight) is used in place of the one from Supplement 4 (1764 lb / 800 kg maximum weight).
- 
- 11. **Weight and Balance:** Not Affected
  - 12. **Credit Terms and Conditions:** Not Applicable

*To obtain satisfactory results, procedures specified in this Service Bulletin must be accomplished in accordance with accepted methods and current government regulations. Diamond Aircraft Industries Inc. cannot be responsible for the quality of work performed in accomplishing the requirements of this Service Bulletin. Diamond Aircraft reserves the right to void continued warranty coverage in the area affected by this Service Bulletin if it is not incorporated.*

*If you no longer own the aircraft to which this Service Bulletin applies, please forward it to the current owner and send the name of the current owner to Diamond Aircraft Industries Inc., at the address below.*

Diamond Aircraft Industries Inc. 1560 Crumlin Road, London, Ontario, Canada N5V 1S2  
Phone: (519) 457-4041 Fax: (519) 457-4060

COPYRIGHT 2007